# ELECTRIC WHEEL LOADER 403E








# OPERATING WEIGHTBATTERY CAPACITYSHOVEL CAPACITY2729kg20kWh0.5m³

# LESS NOISE

With no mechanical diesel engine, the 403E has minimal operating noise, allowing operators to communicate safely with people around them and in sensitive environments.

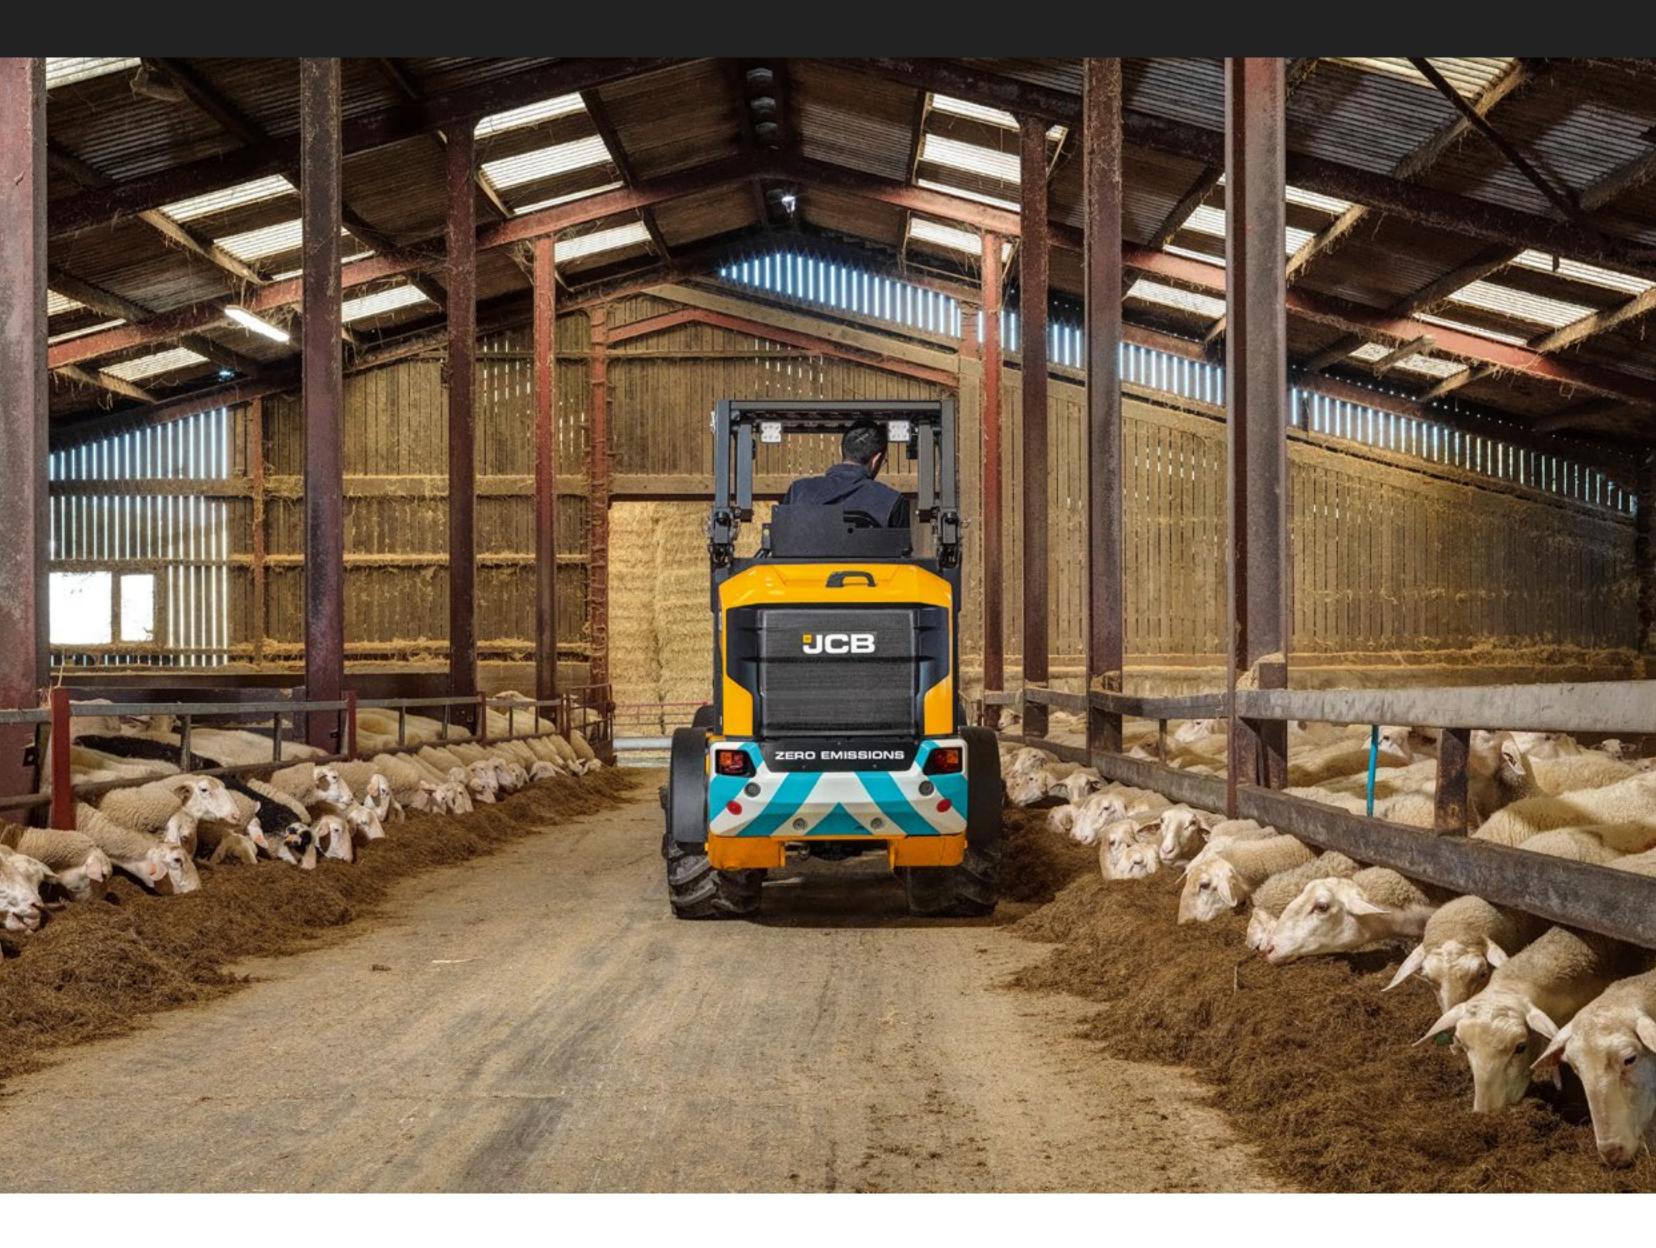





### **LESS LIMITATION**




The 403E provides safer, more efficient ways of working, especially when operating in noise sensitive areas.

## **LESS VIBRATION**

The 403E is a comfortable place to work, and no mechanical engine means that vibrations are reduced to a minimum.



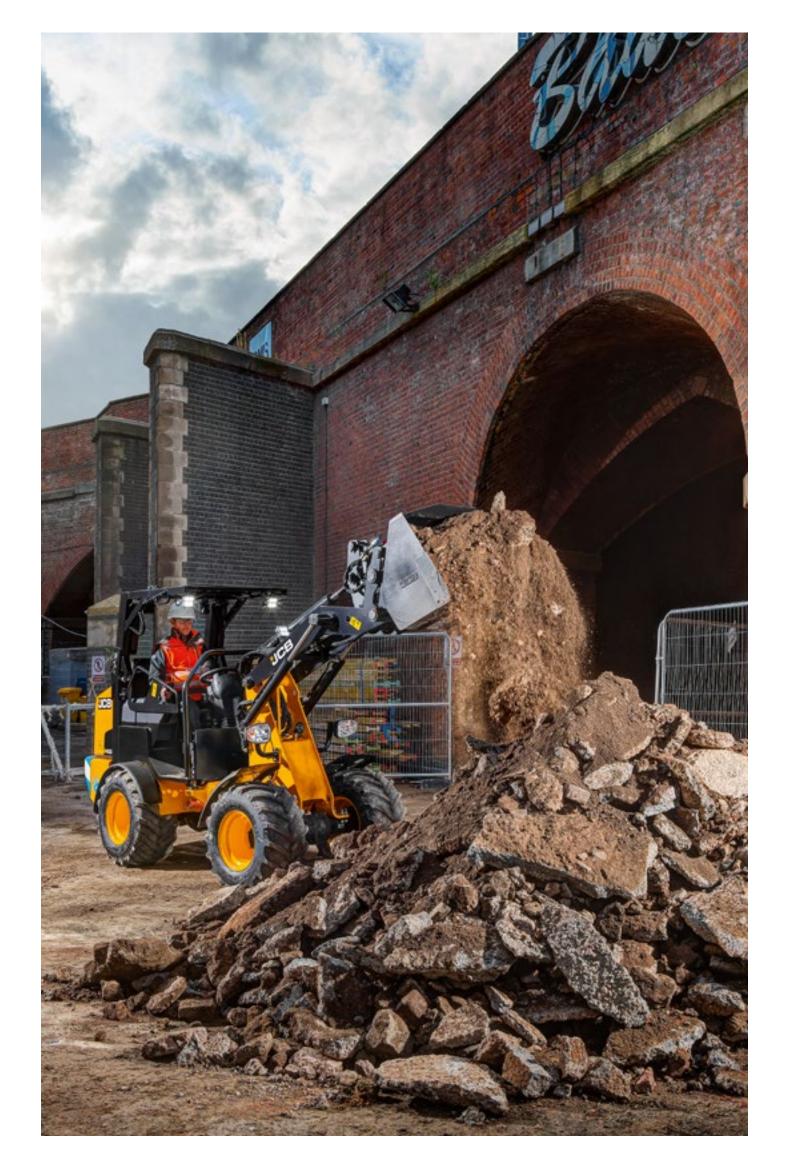




LESS WEAR & TEAR With less internal machine part vibrations, wear and tear is significantly reduced.

# **LESS POLLUTION**

With zero emissions at point of use, the 403E gives you the ability to work in enclosed environments, as well as helping to reduce your carbon footprint.

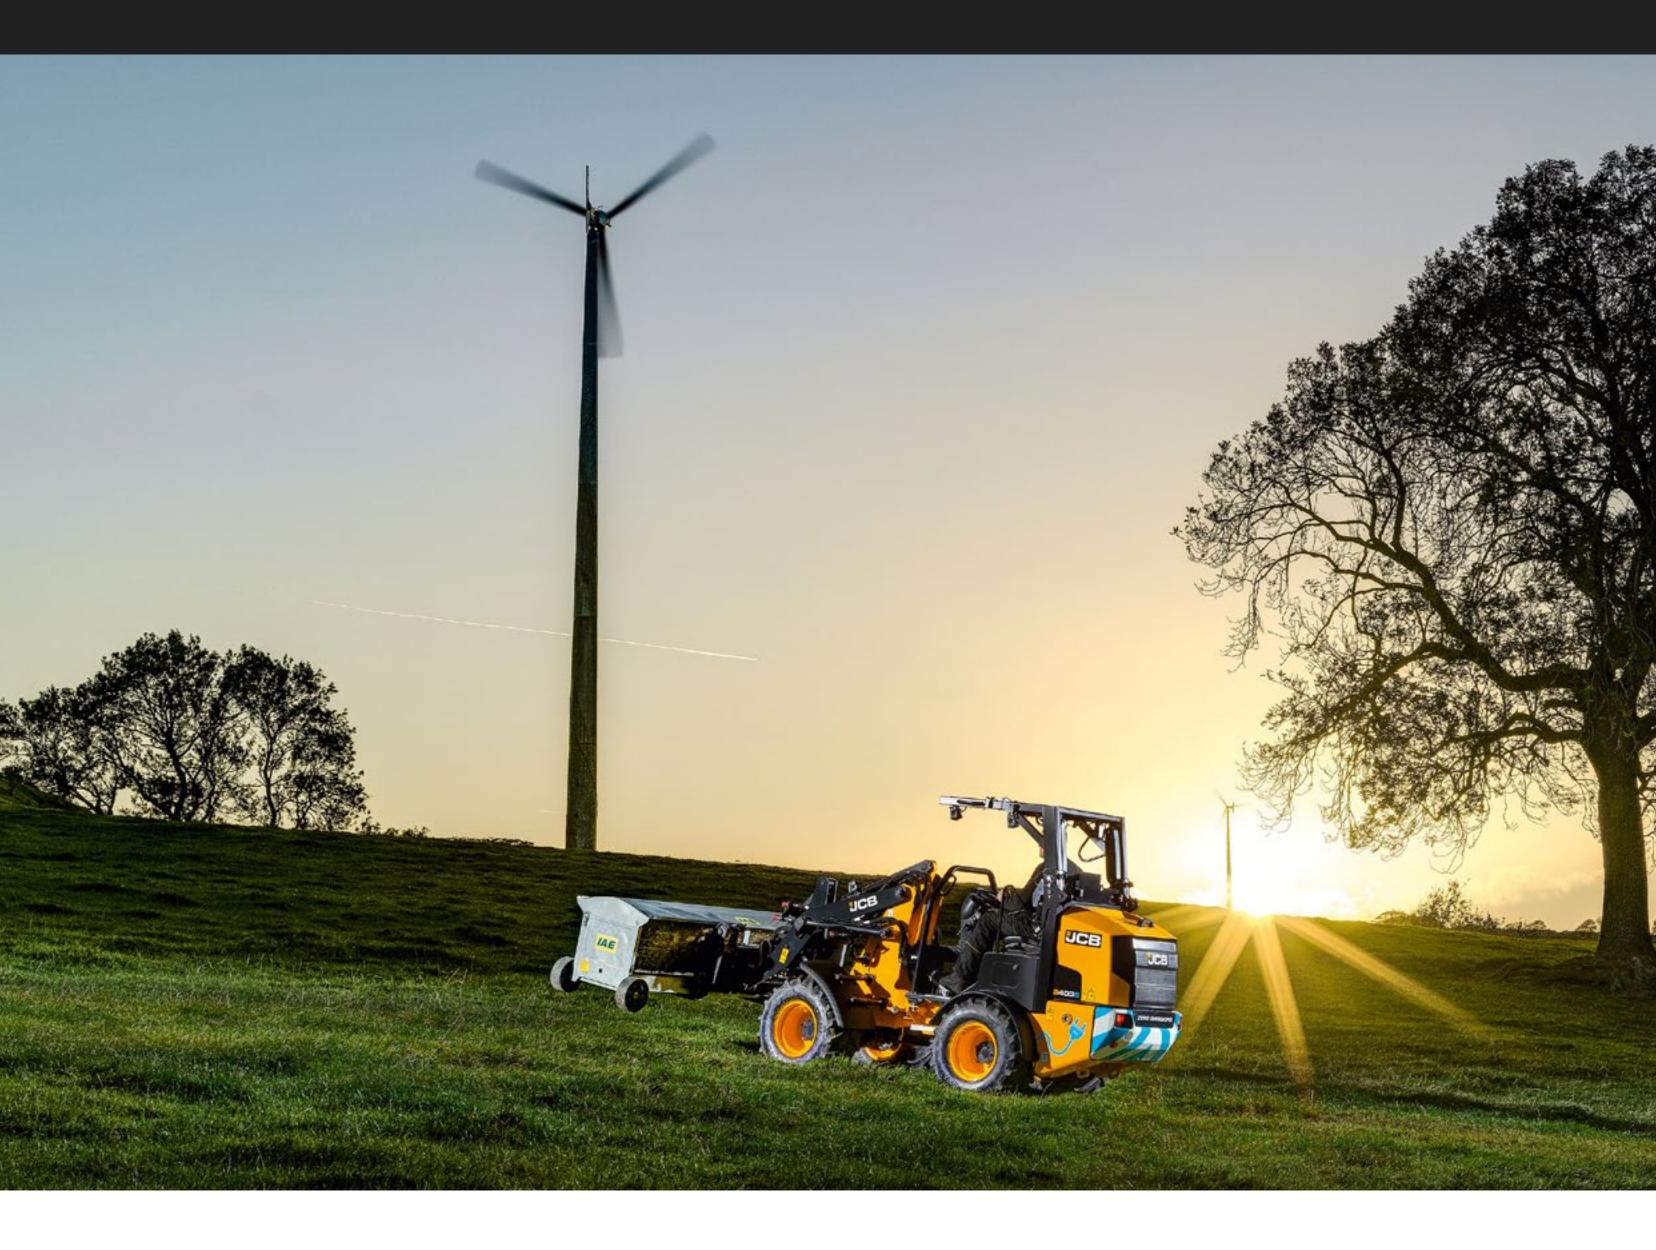





### **LESS CHARGING**




### The 403E has three work modes to help conserve battery power: Roading, Dynamic and Precision.


## **LESS MAINTENANCE**

The 403E's electrical components are maintenance free, so less time and money is spent on daily checks and servicing, increasing uptime & maximising productivity.



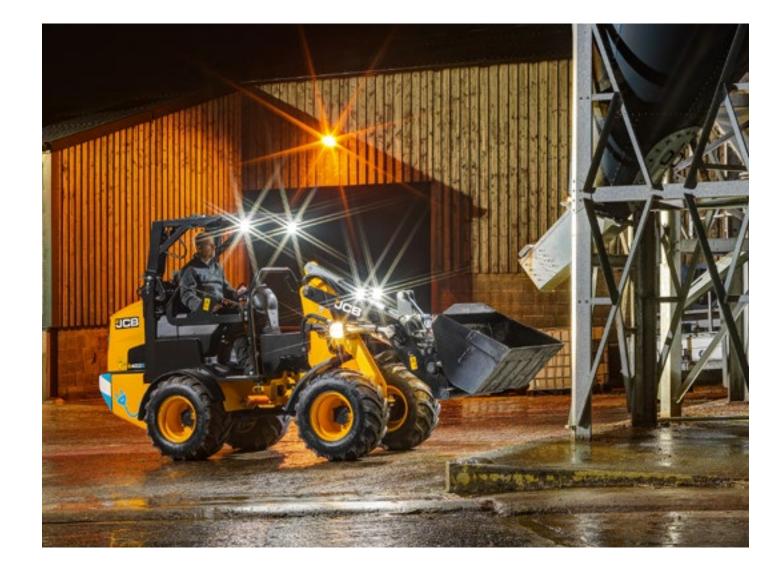



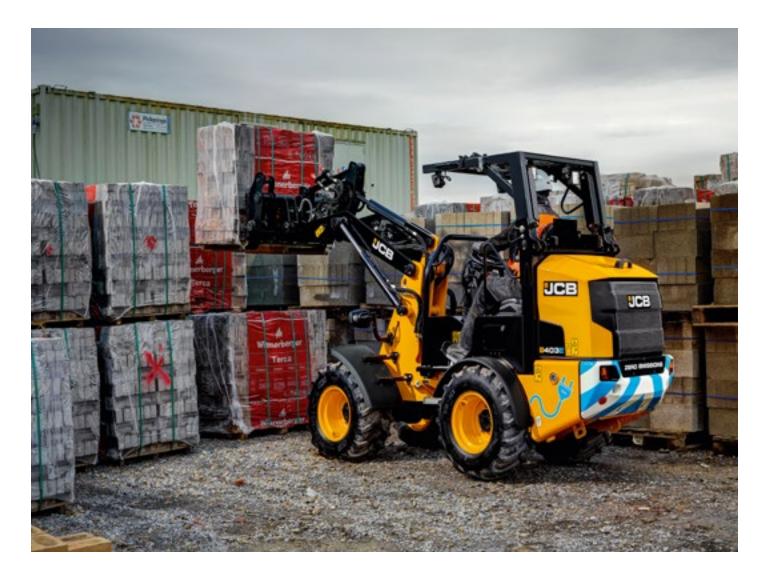




#### LESS WORRY

High quality core components make the 403E ready for a long and reliable life.

# LESS HASSLE

With flexible charging options, you can simply plug your 403E into the normal household grid or CEE socket when you need to charge the battery.

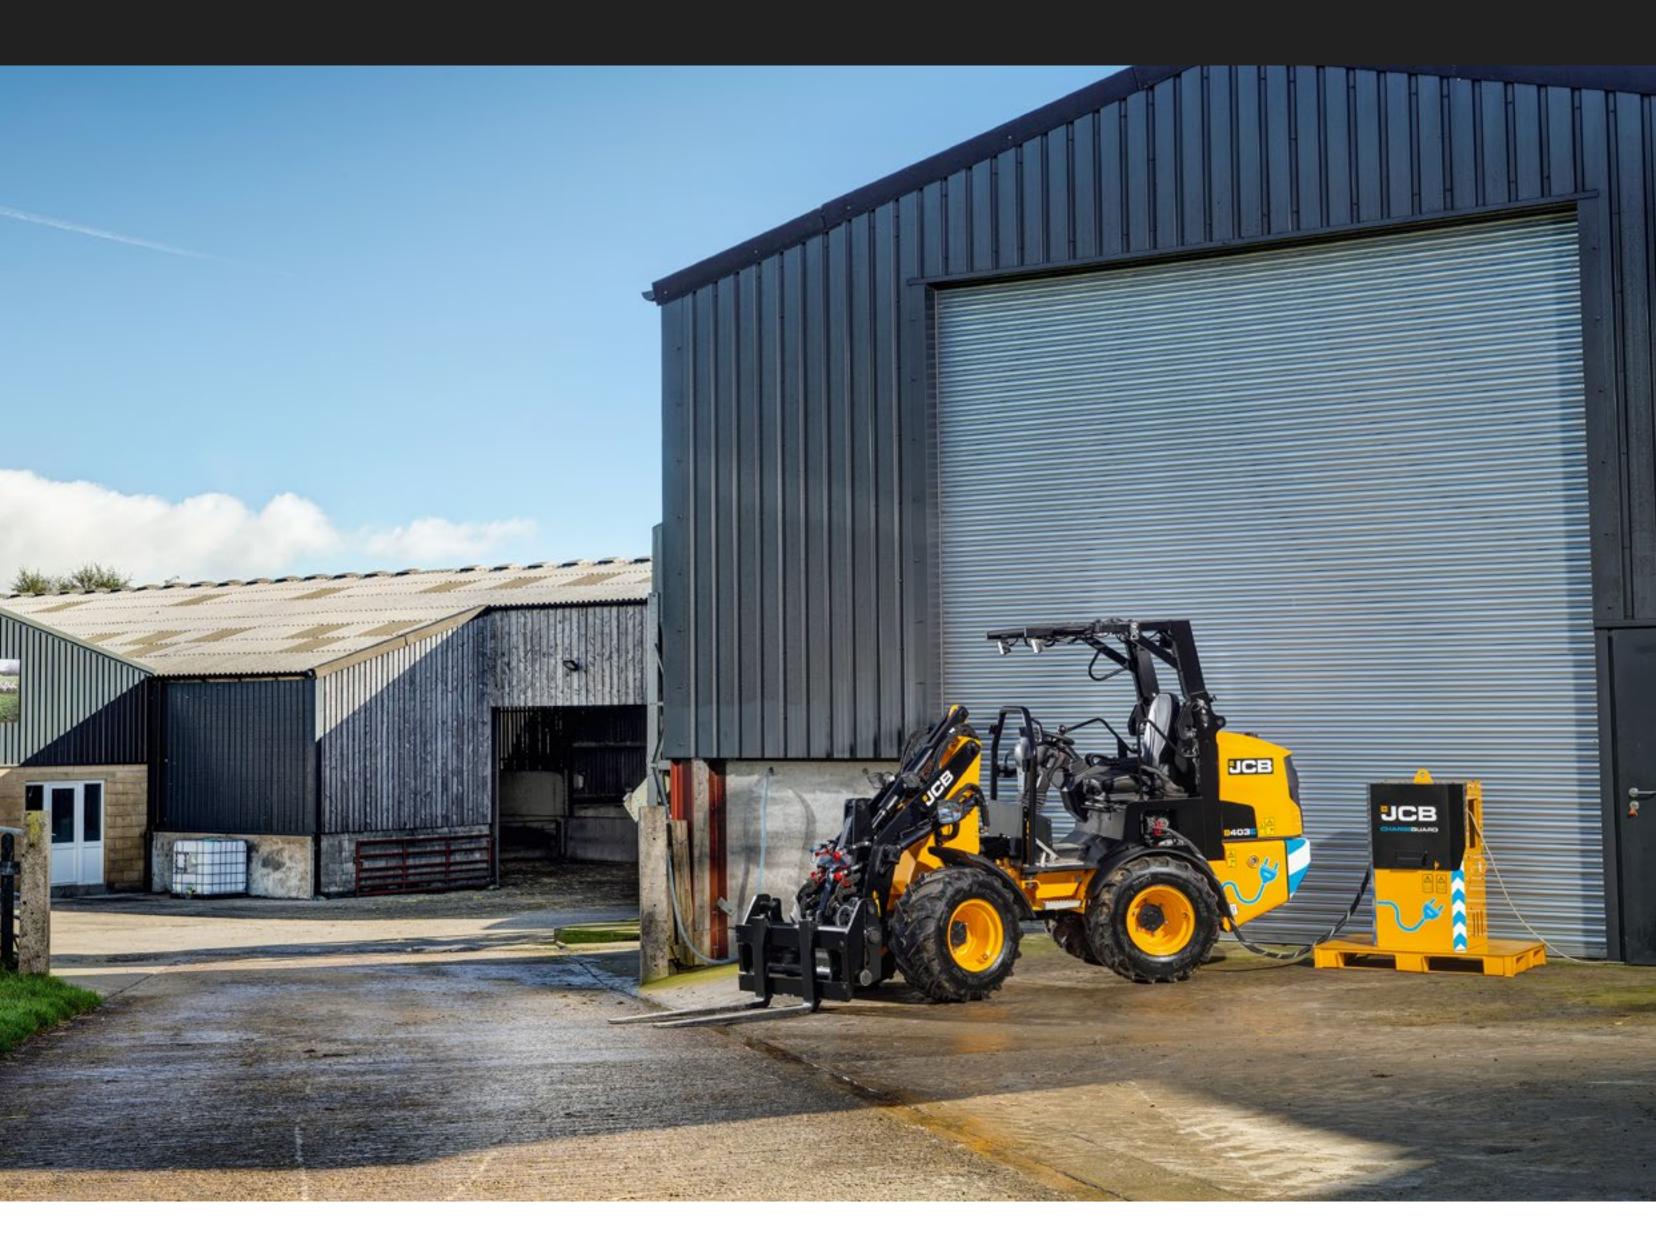



#### **LESS STOPPING**



A continuous run time in excess of 4 hours allows a full day's work.

### **ELECTRIC WHEEL LOADER** 403E



### SPECIFICATION

MODEL		<b>403E</b>
Operating weight*	kg	2729
Battery capacity kV	۷h	20
Shovel capacity*	m³	0.5
Full turn tipping load*	kg	I237

Payload*	kg	618
Max Speed	kph	20

\*Standard loader arm, 1480mm wide shovel, and fixed canopy operator station



### **STANDARD FEATURES**

- On board charging system (110V & 240V)
- Optional fast charger unit for 2hr charge time
- Multi-functional display with rotary controller
- Programmable speed 0.5kph-20kph
- One auxiliary service

- Programmable constant flow auxiliary
- Dynamic & precision loader arm modes
- Fixed canopy with optional folding canopy
- Hydraulic locking quickhitch
- 5-year manufacturer battery warranty



"The 403E is such a versatile machine, we do everything with it. There's no compromise on performance whatsoever."

#### SIMEON TURNER | FARM OWNER, ENGLAND

### **FIND OUT MORE**

### **REQUEST A QUOTE**



30441 / en-GB / Issue I

©2022 J C Bamford Excavators Ltd.